


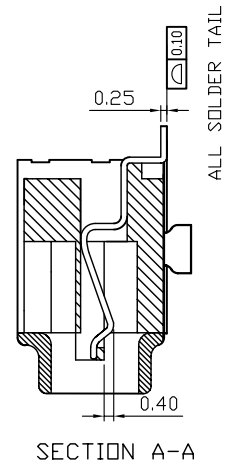
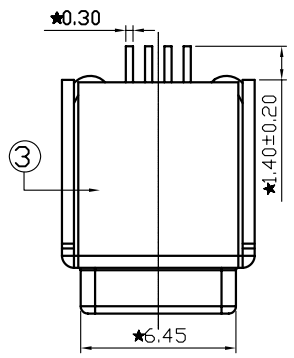
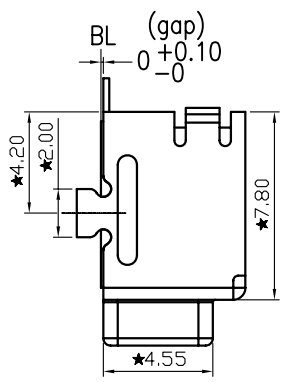
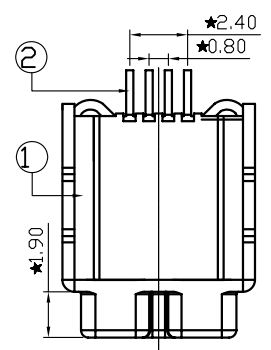



NUMBER C-800069

METRIC

UNIT:mm



Electrical
 Voltage: 5.0 V
 Current: 0.5 A
 Contact Resistance: Terminal 50 milliohms max-shell and Terminal
 Insulation Resistance: 100 Megohms min
 Dielectric Withstanding Voltage: 100 V AC/1 min
 Temperature: -40°C~85°C
 ★ 為重要檢驗尺寸

1-082-800069	RoHS
0-082-800069	NO RoHS
PART NUMBER	PART NOTE

TABLE:1

082-800069-6XX	NYLON 6T(WHITE)
082-800069-5XX	LCP(WHITE)
082-800069-4XX	PBT(WHITE)
082-800069-3XX	NYLON 6T(BLACK)
082-800069-2XX	LCP(BLACK)
082-800069-1XX	PBT(BLACK)
PART NUMBER	HOUSING MATERIAL

TABLE:2

082-800069-X05	30u" GOLD
082-800069-X04	15u" GOLD
082-800069-X03	10u" GOLD
082-800069-X02	5u" GOLD
082-800069-X01	GOLD FLASH
PART NUMBER	CONTACT PLATING

TOLERANCES UNLESS OTHERWISE SPECIFIED: DWN	Doris.Tsai 31-JUL-2006	GMT GLOBEMASTER TECHNOLOGIES CO.,LTD.			
0 PLC ± 1 PLC ±0.30 2 PLC ±0.20 3 PLC ±0.10 ANGLES ±3°	CHK Jacky.Lin 31-JUL-2006				
MATERIAL SEE NOTE	APVD James.Chan 31-JUL-2006	NAME 1394 4P/F SMT 短腳			
FINISH SEE NOTE	WEIGHT -- GRAM	LOC DW A3			
PRODUCT SPEC SEE NOTE	SCALE 1:1	DRAWING NO C-800069			
LTR	REVISION RECORD	ECN	DWN DATE	DATE	REV
				06/31	A
					1 OF 1

LTR	REVISION RECORD	ECN	DWN DATE	DATE	REV
				06/31	A
					1 OF 1

CUSTOMER DRAWING