


NUMBER C-800007

3RD ANGLE PROJECTION

METRIC

UNIT:mm

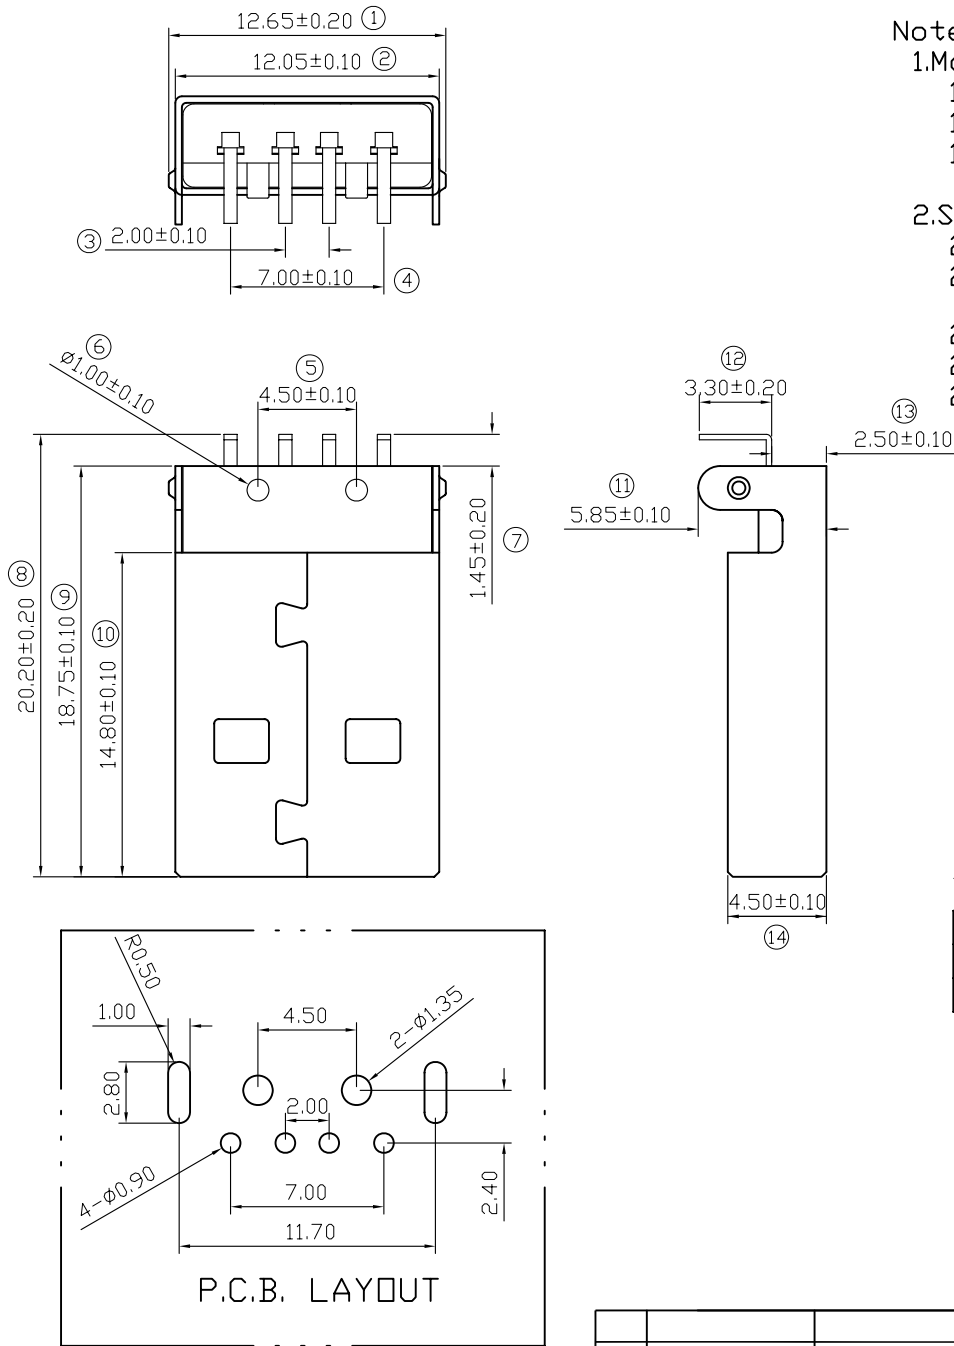

Note:

1.Material:

- 1.1 Insulator: L.C.P UL 94-V0 rated.
- 1.2 Contact: Brass,t=0.25mm.
- 1.3 Shell: Cold rolled steel,t=0.30mm.

2.Specification:

- 2.1 Current rating: 1 A Max.
- 2.2 Dielectric withstanding voltage: 500 V(ac) for 1 minute.
- 2.3 Contact resistance: 30 mW Max.
- 2.4 Insulation resistance: 1000 MW Min at DC 500V.
- 2.5 Temperature range: -55°C~+240°C.

TABLE:1

146-800007-6XX	NYLON 6T(WHITE)
146-800007-5XX	LCP(WHITE)
146-800007-4XX	PBT(WHITE)
146-800007-3XX	NYLON 6T(BLACK)
146-800007-2XX	LCP(BLACK)
146-800007-1XX	PBT(BLACK)
PART NUMBER	HOUSING MATERIAL

TABLE:2

146-800007-XX6	30u"GOLD
146-800007-XX5	15u"GOLD
146-800007-XX4	10u"GOLD
146-800007-XX3	5u"GOLD
146-800007-XX2	3u"GOLD
146-800007-XX1	1u"GOLD
PART NUMBER	CONTACT PLATING

TABLE:3

146-800007-X2X	REEL
146-800007-X1X	TRAY
PART NUMBER	HOUSING MATERIAL

1-146-800007	RoHS
0-146-800007	NO RoHS
PART NUMBER	PART NOTE

A	FIRST RELEASED	GMT200607-146	02/08/02
LTR	REVISION RECORD	ECN	DATE

TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ±0 1 PLC ±0.30 2 PLC ±0.20 3 PLC ±0.10 ANGLES ±3°	DWN Doris.Tsai 02-AUG-2006 CHK Jacky.Lin 02-AUG-2006	GMT GLOBEMASTER TECHNOLOGIES CO.,LTD.	
MATERIAL SEE NOTE	APVD James.Chan 02-AUG-2006	NAME SINGLE USB A MALE DIP TYPE1	
FINISH SEE NOTE	WEIGHT -- GRAM	LOC DW A	SIZE 3
	PRODUCT SPEC SEE NOTE	DRAWING NO C-800007	
		SCALE 1:1	SHEET 1 OF 1
			REV A